

In Vitro Examination of Poly(glycerol sebacate) Degradation Kinetics: Effects of Porosity and Cure Temperature

Nadia M. Krook¹, Israd H. Jaafar², Tooba Sarkhosh¹, Courtney LeBlon², John P. Coulter², Sabrina S. Jedlicka^{1,3,4}

¹Department of Materials Science & Engineering, Whitaker Laboratory, Lehigh University, Bethlehem, PA, 18015

²Department of Mechanical Engineering and Mechanics, Packard Laboratory, Lehigh University, Bethlehem, PA, 18015

³Bioengineering Program, Lehigh University, Bethlehem, PA, 18015

Correspondence to: Sabrina S. Jedlicka (E-mail: ssj207@lehigh.edu)

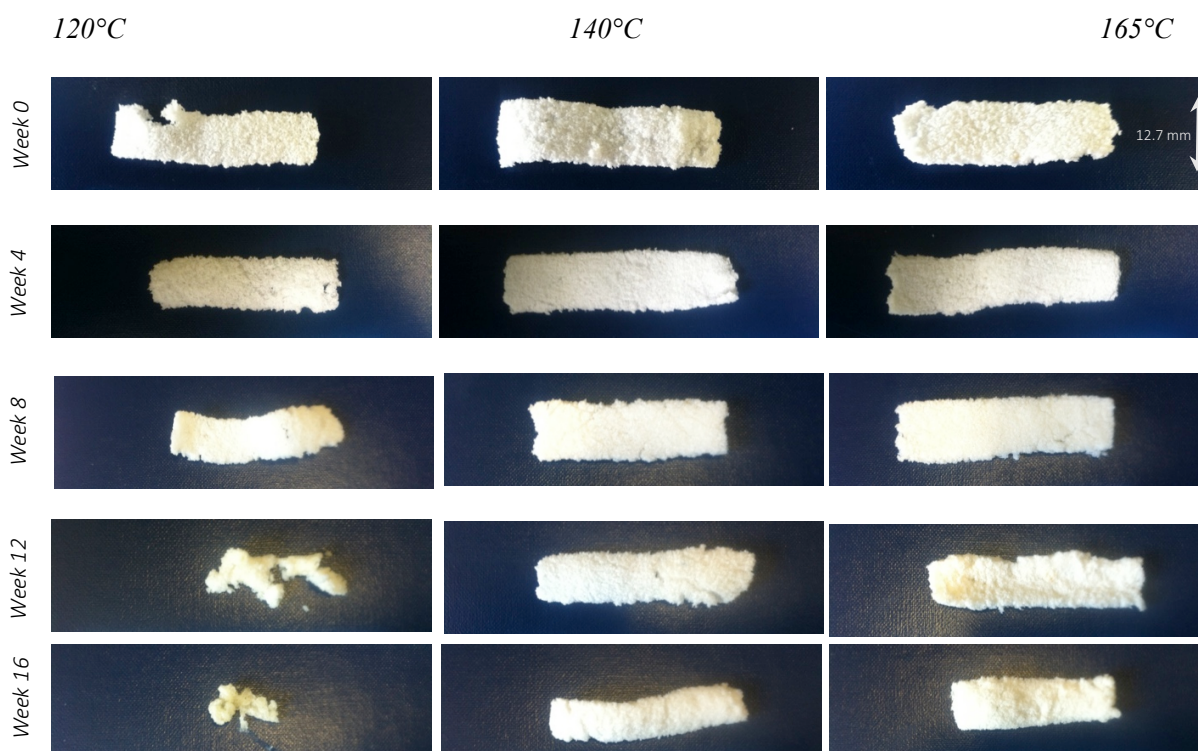


Figure S1. Macroscopic digital images of the porous PGS scaffolds cured at either (left) 120°C, (center) 140°C, or (right) 165°C before biodegradation began (week 0) and then at consequent time points of degradation in SBF: week 4, week 8, week 12, and week 16.