

Supporting information for

Multiscale hybrid CNT and CF reinforced PEEK composites with enhanced EMI properties

Shouyi Cao, Yinping Tao*, Hong Li*, Musu Ren, Jinliang Sun

Composite Materials Research Centre, School of Materials Science and Engineering,
Shanghai University, Shanghai, 200444, PR China

Corresponding to: yinpingtao21@shu.edu.cn; hongli2007@shu.edu.cn

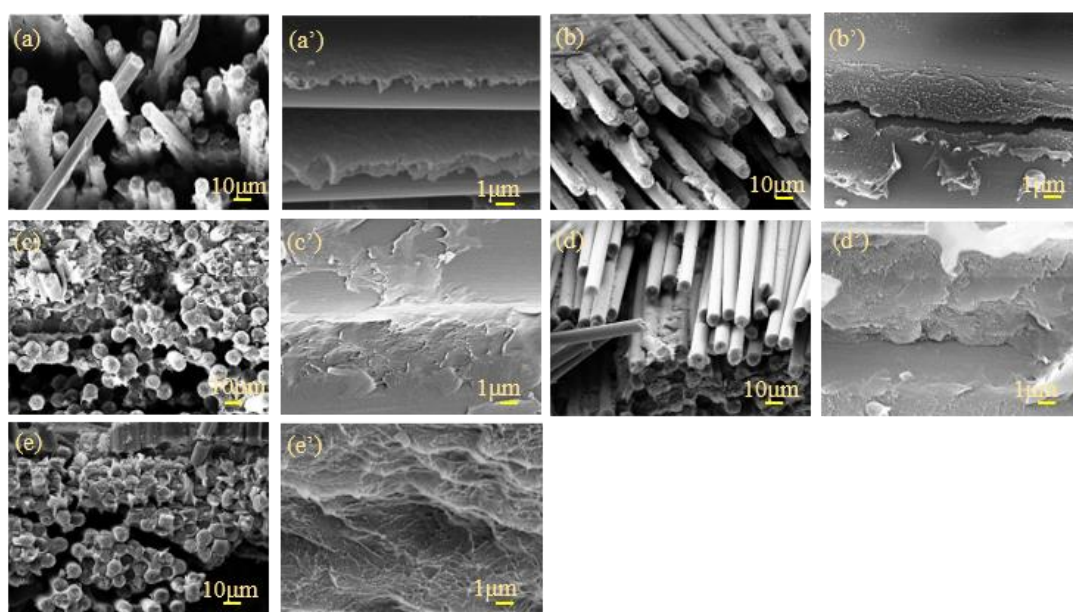


Figure S1. SEM images of brittle fracture surface of the laminates: (a, a') 0.0 g/m²; (b, b') 0.5 g/m²; (c, c') 1.5 g/m²; (d, d') 2.5 g/m²; (e, e') 4.5 g/m².